



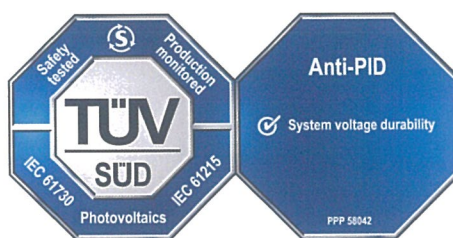
Product Service

CERTIFICATE

No. Z2 17 03 72092 209

Holder of Certificate: Shanghai JA Solar Technology Co., Ltd

No. 118, Lane 3111,
West Huancheng Road
Fengxian District
201401 Shanghai
PEOPLE'S REPUBLIC OF CHINA

**Certification Mark:****Product:**

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition the certification holder must not transfer the certificate to third parties. See also notes overleaf.

Test report no.: 704061209503-07**Valid until:** 2022-03-07**Date,** 2017-03-13

(Zhulin Zhang)

Page 1 of 4



Product Service

CERTIFICATE**No. Z2 17 03 72092 209****Model(s):**

JAM6-60-xxx, xxx=200 to 250 in step of 5
 JAM6-72-xxx/SI, xxx=285 to 325 in step of 5
 JAM6-60-xxx/SI, xxx=235 to 280 in step of 5
 JAM6(R)-72-xxx/PR, xxx=330 to 350 in step of 5
 JAM6(R)-60-xxx/PR, xxx=280 to 295 in step of 5
 JAM6(R)-48-xxx/PR, xxx=220 to 235 in step of 5
 JAM6-72-xxx/PR, xxx=325 to 345 in step of 5
 JAM6-60-xxx/PR, xxx=275 to 290 in step of 5
 JAM6-48-xxx/PR, xxx=215 to 235 in step of 5
 JAM6(L)-72-xxx/PR, xxx=325 to 345 in step of 5
 JAM6(L)-60-xxx/PR, xxx=270 to 295 in step of 5
 JAM6(L)-54-xxx/PR, xxx=250 to 270 in step of 5
 JAM6(L)-48-xxx/PR, xxx=215 to 235 in step of 5
 JAM6(K)-72-xxx/PR, xxx=325 to 360 in step of 5
 JAM6(K)-60-xxx/PR, xxx=275 to 300 in step of 5
 JAM6(K)-54-xxx/PR, xxx=250 to 265 in step of 5
 JAM6(K)-48-xxx/PR, xxx=220 to 235 in step of 5
 JAM6(K)(SE)-72-xxx/PR, xxx=325 to 350 in step of 5
 JAM6(K)(SE)-60-xxx/PR, xxx=275 to 300 in step of 5
 JAM6(K)(TG)-72-xxx/PR, xxx=325 to 350 in step of 5
 JAM6(K)(TG)-60-xxx/PR, xxx=275 to 300 in step of 5
 JAM6(K)-72-xxx/4BB, xxx=320 to 340 in step of 5
 JAM6(K)-60-xxx/4BB, xxx=265 to 285 in step of 5
 JAM6(K)-54-xxx/4BB, xxx=235 to 250 in step of 5
 JAM6(K)-48-xxx/4BB, xxx=210 to 225 in step of 5
 JAM6(K)(TG)-72-xxx/4BB, xxx=320 to 335 in step of 5
 JAM6(K)(TG)-60-xxx/4BB, xxx=265 to 280 in step of 5
 JAM6(K)(SE)-72-xxx/4BB, xxx=320 to 345 in step of 5
 JAM6(K)(SE)-60-xxx/4BB, xxx=265 to 290 in step of 5
 JAM6(K)(FA)-60-xxx/4BB, xxx=265 to 290 in step of 5
 JAM6(K)(DG)-60- xxx /4BB/1500V, xxx=260 to 285 in step of 5
 JAM6(K)(DG)-72- xxx /4BB/1500V, xxx=320 to 340 in step of 5
 JAM6(K)-60- xxx /4BB/1500V, xxx= 265 to 280 in step of 5
 JAM6(K)-72- xxx /4BB/1500V, xxx= 320 to 340 in step of 5
 JAM6(K)-60- xxx /PR/1500V, xxx= 285 to 295 in step of 5
 JAM6(K)-72- xxx /PR/1500V, xxx= 345 to 355 in step of 5
 xxx is standing for rated output power at STC

Parameters:

Rated Output Power

at STC:

see attachment.

Construction:

Framed or Frameless,
with Junction box,
Cable and Connectors.

Fire Safety Class:

Class C

Application Class:

Class A

Maximum System Voltage:

1000 V DC or 1500 V DC

PID test condition:

±1000 V DC, 96 h, 60°C, 85% RH or
96 h, 85°C, 85% RH
±1500 V DC, 96 h, 85°C, 85% RH

PID testing method according to IEC TS 62804-1:2015

Tested**according to:**

IEC 61215(ed.2)

IEC 61730-1(ed.1);am1;am2

IEC 61730-2(ed.1);am1

PPP 58042B:2015

Production**Facility(ies):**

72092, 79395, 72056, 90968, 95903

Page 2 of 4

CERTIFICATE

No. Z2 17 03 72092 209



Product Service

The following models will be covered by above certificate:

Maximum System Voltage: 1000 V DC	
Model	Rated Output Power at STC
JAM6-60-200, JAM6-60-205, JAM6-60-210, JAM6-60-215, JAM6-60-220, JAM6-60-225, JAM6-60-230, JAM6-60-235, JAM6-60-240, JAM6-60-245, JAM6-60-250;	200 W, 205 W, 210 W, 215 W, 220 W, 225 W, 230 W, 235 W, 240 W, 245 W, 250 W;
JAM6-72-285/SI, JAM6-72-290/SI, JAM6-72-295/SI, JAM6-72-300/SI, JAM6-72-305/SI, JAM6-72-310/SI, JAM6-72-315/SI, JAM6-72-320/SI, JAM6-72-325/SI;	285 W, 290 W, 295 W, 300 W, 305 W, 310 W, 315 W, 320 W, 325 W;
JAM6-60-235/SI, JAM6-60-240/SI, JAM6-60-245/SI, JAM6-60-250/SI, JAM6-60-255/SI, JAM6-60-260/SI, JAM6-60-265/SI, JAM6-60-270/SI, JAM6-60-275/SI, JAM6-60-280/SI;	235 W, 240 W, 245 W, 250 W, 255 W, 260 W, 265 W, 270 W, 275 W, 280 W;
JAM6(R)-72-330/PR, JAM6(R)-72-335/PR, JAM6(R)-72-340/PR, JAM6(R)-72-345/PR, JAM6(R)-72-350/PR;	330 W, 335 W, 340 W, 345 W, 350 W;
JAM6(R)-60-280/PR, JAM6(R)-60-285/PR, JAM6(R)-60-290/PR, JAM6(R)-60-295/PR;	280 W, 285 W, 290 W, 295 W;
JAM6(R)-48-220/PR, JAM6(R)-48-225/PR, JAM6(R)-48-230/PR, JAM6(R)-48-235/PR;	220 W, 225 W, 230 W, 235 W;
JAM6-72-325/PR, JAM6-72-330/PR, JAM6-72-335/PR, JAM6-72-340/PR, JAM6-72-345/PR;	325 W, 330 W, 335 W, 340 W, 345 W;
JAM6-60-275/PR, JAM6-60-280/PR, JAM6-60-285/PR, JAM6-60-290/PR;	275 W, 280 W, 285 W, 290 W;
JAM6-48-215/PR, JAM6-48-220/PR, JAM6-48-225/PR, JAM6-48-230/PR, JAM6-48-235/PR;	215 W, 220 W, 225 W, 230 W, 235 W;
JAM6(L)-72-325/PR, JAM6(L)-72-330/PR, JAM6(L)-72-335/PR, JAM6(L)-72-340/PR, JAM6(L)-72-345/PR;	325 W, 330 W, 335 W, 340 W, 345 W;
JAM6(L)-60-270/PR, JAM6(L)-60-275/PR, JAM6(L)-60-280/PR, JAM6(L)-60-285/PR, JAM6(L)-60-290/PR, JAM6(L)-60-295/PR;	270 W, 275 W, 280 W, 285 W, 290 W, 295 W;
JAM6(L)-54-250/PR, JAM6(L)-54-255/PR, JAM6(L)-54-260/PR, JAM6(L)-54-265/PR, JAM6(L)-54-270/PR;	250 W, 255 W, 260 W, 265 W, 270 W;
JAM6(L)-48-215/PR, JAM6(L)-48-220/PR, JAM6(L)-48-225/PR, JAM6(L)-48-230/PR, JAM6(L)-48-235/PR;	215 W, 220 W, 225 W, 230 W, 235 W;
JAM6(K)-72-325/PR, JAM6(K)-72-330/PR, JAM6(K)-72-335/PR, JAM6(K)-72-340/PR, JAM6(K)-72-345/PR, JAM6(K)-72-350/PR; JAM6(K)-72-355/PR, JAM6(K)-72-360/PR;	325 W, 330 W, 335 W, 340 W, 345 W, 350 W, 355 W, 360 W;
JAM6(K)-60-275/PR, JAM6(K)-60-280/PR, JAM6(K)-60-285/PR, JAM6(K)-60-290/PR, JAM6(K)-60-295/PR, JAM6(K)-60-300/PR;	275 W, 280 W, 285 W, 290 W, 295 W, 300 W;
JAM6(K)-54-250/PR, JAM6(K)-54-255/PR, JAM6(K)-54-260/PR, JAM6(K)-54-265/PR;	250 W, 255 W, 260 W, 265 W;
JAM6(K)-48-220/PR, JAM6(K)-48-225/PR, JAM6(K)-48-230/PR, JAM6(K)-48-235/PR;	220 W, 225 W, 230 W, 235 W;
JAM6(K)(SE)-72-325/PR, JAM6(K)(SE)-72-330/PR, JAM6(K)(SE)-72-335/PR, JAM6(K)(SE)-72-340/PR, JAM6(K)(SE)-72-345/PR, JAM6(K)(SE)-72-350/PR;	325 W, 330 W, 335 W, 340 W, 345 W, 350 W;
JAM6(K)(SE)-60-275/PR, JAM6(K)(SE)-60-280/PR, JAM6(K)(SE)-60-285/PR, JAM6(K)(SE)-60-290/PR, JAM6(K)(SE)-60-295/PR, JAM6(K)(SE)-60-300/PR;	275 W, 280 W, 285 W, 290 W, 295 W, 300 W;

CERTIFICATE

No. Z2 17 03 72092 209



Product Service

JAM6(K)(TG)-72-325/PR, JAM6(K)(TG)-72-330/PR, JAM6(K)(TG)-72-335/PR, JAM6(K)(TG)-72-340/PR, JAM6(K)(TG)-72-345/PR, JAM6(K)(TG)-72-350/PR;	325 W, 330 W, 335 W, 340 W, 345 W, 350 W;
JAM6(K)(TG)-60-275/PR, JAM6(K)(TG)-60-280/PR, JAM6(K)(TG)-60-285/PR, JAM6(K)(TG)-60-290/PR, JAM6(K)(TG)-60-295/PR, JAM6(K)(TG)-60-300/PR;	275 W, 280 W, 285 W, 290 W, 295 W, 300 W;
JAM6(K)-72-320/4BB, JAM6(K)-72-325/4BB, JAM6(K)-72-330/4BB, JAM6(K)-72-335/4BB; JAM6(K)-72-340/4BB;	320 W, 325 W, 330 W, 335 W; 340 W;
JAM6(K)-60-265/4BB, JAM6(K)-60-270/4BB, JAM6(K)-60-275/4BB, JAM6(K)-60-280/4BB; JAM6(K)-60-285/4BB;	265 W, 270 W, 275 W, 280 W; 285 W;
JAM6(K)-54-235/4BB, JAM6(K)-54-240/4BB, JAM6(K)-54-245/4BB, JAM6(K)-54-250/4BB;	235 W, 240 W, 245 W, 250 W;
JAM6(K)-48-210/4BB, JAM6(K)-48-215/4BB, JAM6(K)-48-220/4BB, JAM6(K)-48-225/4BB;	210 W, 215 W, 220 W, 225 W;
JAM6(K)(TG)-72-320/4BB, JAM6(K)(TG)-72-325/4BB, JAM6(K)(TG)-72-330/4BB, JAM6(K)(TG)-72-335/4BB;	320 W, 325 W, 330 W, 335 W;
JAM6(K)(TG)-60-265/4BB, JAM6(K)(TG)-60-270/4BB, JAM6(K)(TG)-60-275/4BB, JAM6(K)(TG)-60-280/4BB;	265 W, 270 W, 275 W, 280 W;
JAM6(K)(SE)-72-320/4BB, JAM6(K)(SE)-72-325/4BB, JAM6(K)(SE)-72-330/4BB, JAM6(K)(SE)-72-335/4BB, JAM6(K)(SE)-72-340/4BB, JAM6(K)(SE)-72-345/4BB;	320 W, 325 W, 330 W, 335 W, 340 W, 345 W;
JAM6(K)(SE)-60-265/4BB, JAM6(K)(SE)-60-270/4BB, JAM6(K)(SE)-60-275/4BB, JAM6(K)(SE)-60-280/4BB, JAM6(K)(SE)-60-285/4BB, JAM6(K)(SE)-60-290/4BB;	265 W, 270 W, 275 W, 280 W, 285 W, 290 W;
JAM6(K)(FA)-60-265/4BB, JAM6(K)(FA)-60-270/4BB, JAM6(K)(FA)-60-275/4BB, JAM6(K)(FA)-60-280/4BB, JAM6(K)(FA)-60-285/4BB, JAM6(K)(FA)-60-290/4BB;	265 W, 270 W, 275 W, 280 W, 285 W, 290 W;

Maximum System Voltage: 1500 V DC	
Model	Rated Output Power at STC
JAM6(K)(DG)-60-260/4BB/1500V, JAM6(K)(DG)-60-265/4BB/1500V, JAM6(K)(DG)-60-270/4BB/1500V, JAM6(K)(DG)-60-275/4BB/1500V, JAM6(K)(DG)-60-280/4BB/1500V, JAM6(K)(DG)-60-285/4BB/1500V;	260 W, 265 W, 270 W, 275 W, 280 W, 285 W;
JAM6(K)(DG)-72-320/4BB/1500V, JAM6(K)(DG)-72-325/4BB/1500V, JAM6(K)(DG)-72-330/4BB/1500V, JAM6(K)(DG)-72-335/4BB/1500V, JAM6(K)(DG)-72-340/4BB/1500V;	320 W, 325 W, 330 W, 335 W, 340 W;
JAM6(K)-60-265/4BB/1500V, JAM6(K)-60-270/4BB/1500V, JAM6(K)-60-275/4BB/1500V, JAM6(K)-60-280/4BB/1500V;	265 W, 270 W, 275 W, 280 W;
JAM6(K)-72-320/4BB/1500V, JAM6(K)-72-325/4BB/1500V, JAM6(K)-72-330/4BB/1500V, JAM6(K)-72-335/4BB/1500V, JAM6(K)-72-340/4BB/1500V;	320 W, 325 W, 330 W, 335 W, 340 W;
JAM6(K)-60-285/PR/1500V, JAM6(K)-60-290/PR/1500V, JAM6(K)-60-295/PR/1500V;	285 W, 290 W, 295 W;
JAM6(K)-72-345/PR/1500V, JAM6(K)-72-350/PR/1500V, JAM6(K)-72-355/PR/1500V;	345 W, 350 W, 355 W;